

# Technical features

## Wall bracket 6-24V

**Cristalys**


### Description :

- ▶ Permits to supply any Cristalys that runs off batteries with permanent power (6-24VAC/DC or 230VAC).
- ▶ Replace the wall bracket provided with the clock.
- ▶ More than one week autonomy without power.
- ▶ Anti-theft locking system.
- ▶ Available in two models depending on the clock.



### Wiring :

- ▶ This bracket allows to connect in parallel several clocks to a single power unit.
- ▶ The power unit can be:
  - a master clock (MIC Delta, MIC S),
  - a very low voltage power supply (6-24V AC/DC) available on site,
  - a plug-in adapter 230V (capacity: 20 clocks).

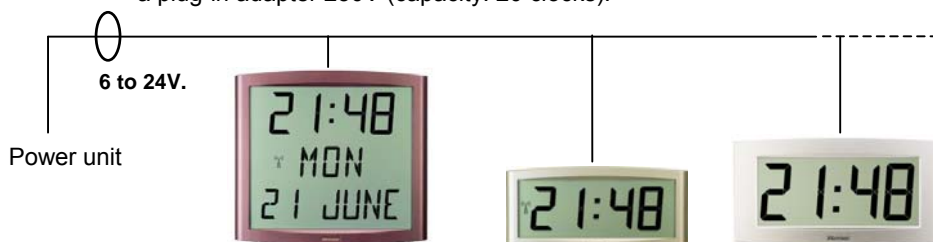

### Technical data :


- ▶ Power supply: very low voltage from 6 to 24V AC or DC without polarity.
- ▶ Insulation: Class III.
- ▶ Protection by fuse : T 315 mA UL 248.
- ▶ Terminal strip: 2 conductors from 0,5<sup>2</sup> to 2,5<sup>2</sup>.
- ▶ Rigid fixing of the clock to the bracket (4 fixing points).
- ▶ Anti-theft screw.

### Norms :


- ▶ EN 60950 : Safety of information technology equipment.
- ▶ EN 50081-1 : EMC - Generic emission standard.
- ▶ EN 50082-1 : EMC - Generic immunity standard.

### Dimensions in mm

#### Cristalys 7 :



#### Cristalys Ellipse, Date and 14 :

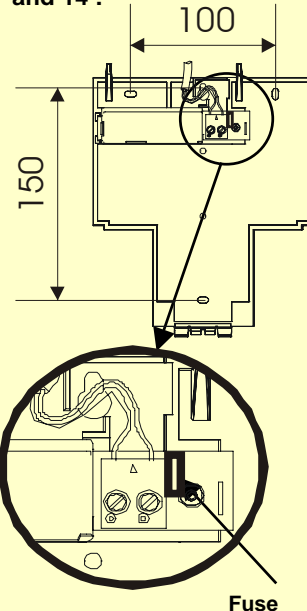

### References :

- |   |         |
|---|---------|
| ▶ Wall bracket 6-24V for Cristalys Ellipse, date and 14 | 938 907 |
| ▶ Wall bracket 6-24V for Cristalys 7                    | 938 903 |
| ▶ Plug-in adapter 230V                                  | 938 912 |

\* To run a clock off the mains 230V, use a wall bracket 6-24V and a plug-in adapter 230V.



Réf.: 643571 A