

Options and mounting accessories

■ Table or shelf bracket



Optional table bracket available for all models

■ Double sided bracket



Optional double sided bracket (wall or ceiling mounting)

■ Recessed mounting bracket




Optional recessed mounting available for *Cristalys 74*



Cristalys


Dimensions in mm

Cristalys 7

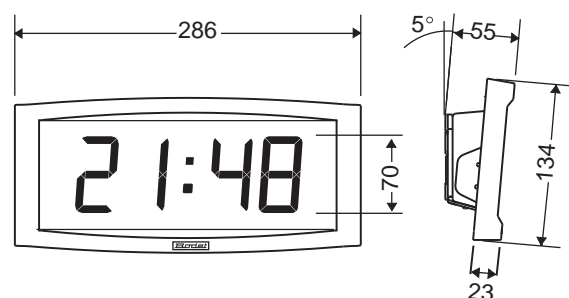


Cristalys Date

Cristalys Ellipse

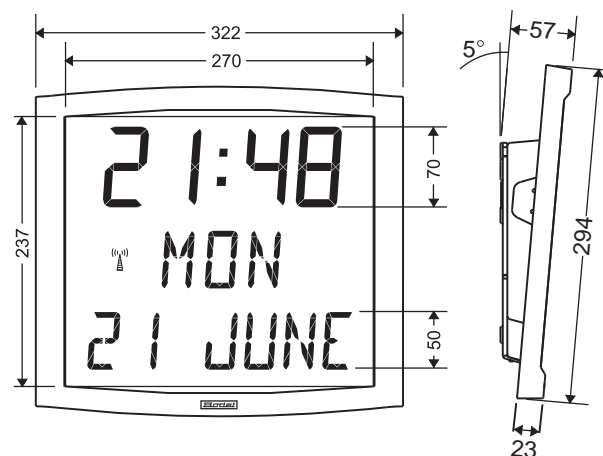

Cristalys 74

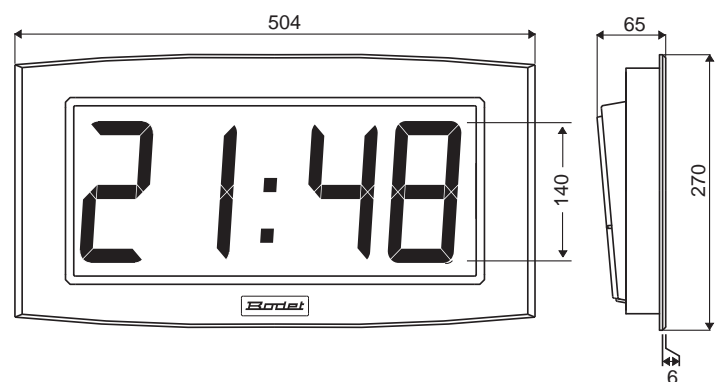

LCD clock

Technical features

Cristalys

Futuristic design

- Interior wall clock with extra flat casing.
- LCD reflective display with very large viewing angle and perfect contrast.
- Silent operation.

Common features

- ABS casing for indoor installation - IP40.
- Wall support supplied with anti-theft lock.
- Display mode: 12 h or 24 h.
- Temperature display: 0 to 50°C.
- 2 programming keys.
- Power by batteries (autonomy over 3 years) or low voltage power supply unit (15V)
- Permanent data saving.
- Time basis accuracy: 0,2 sec/day. Absolute time accuracy with optional radio synchronisation (France Inter or DCF).
- Automatic summer/winter time changeovers and perpetual calendar with multi-time zones.
- Optional low voltage wall support
 - Wall bracket integrating a low voltage 6/24V input to power clocks permanently without batteries.
 - The 230V power supply can be associated to the wall bracket 6-24V in order to power up to 30 slave clocks.

Particular features


Cristalys Date/Ellipse

- Multi languages support (up to 18).

Cristalys 74

- Display of indoor temperature in °C or °F.
Date or year fixed display or week number.

4 casing colours

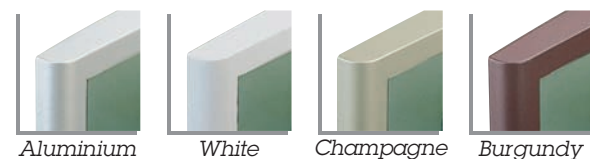

Cristalys 7 Digit height 7 cm



Possibility for fixed or alternate display (2 choices)



24 H time display mode



12 H time display mode



Numerical date or week number

Cristalys 74 Digit height 14 cm



Possibility for fixed or alternate display (2 choices)



12 H or 24 H time display



Temperature display



Numerical date or year

Cristalys Ellipse Digit height 6 cm



Possibility for fixed or alternate display (4 choices)



12 H or 24 H time display and temperature or day/week number



Multilingual or numerical date



Numerical date



Day and week number



7 character text

Cristalys Date Digit height 7 cm



Possibility for fixed or alternate display
Central display (2 choices), lower display (2 choices)



Indoor temperature



Site or city name



Day countdown



Multilingual or numerical date



Day or week number



Second counter

Autonomy over 3 years



Power supply with batteries.
An ECO function provides an energy saving and offers up to 20 % extra life (display is switched off from 11 PM to 6 AM).

| | CRISTALYS 7 | CRISTALYS 14 | CRISTALYS ELLIPSE | CRISTALYS DATE |
|--------------|-------------|--------------|-----------------------------|-----------------------------|
| Digit height | 70 mm | 140 mm | Digit 60 mm Letter 40 mm | Digit 70 mm Letter 50 mm |
| Readability | 30 | 60 | 25 | 30 |
| Weight in kg | 0,7 | 2 | 1,4 | 1,4 |

Versions:

- Independent quartz batteries operated,
- Radio synchronisation batteries operated,
- Impulse or AFNOR receiver batteries operated or TBT,
- DHF wireless receiver batteries operated,
- NTP PoE (Power over Ethernet) slave clock.

Option:

- wall support with TBT (6-24V DC) power supply